


LED Flexible Strip 2110 Series

LM2110-WN240-24V-10mm

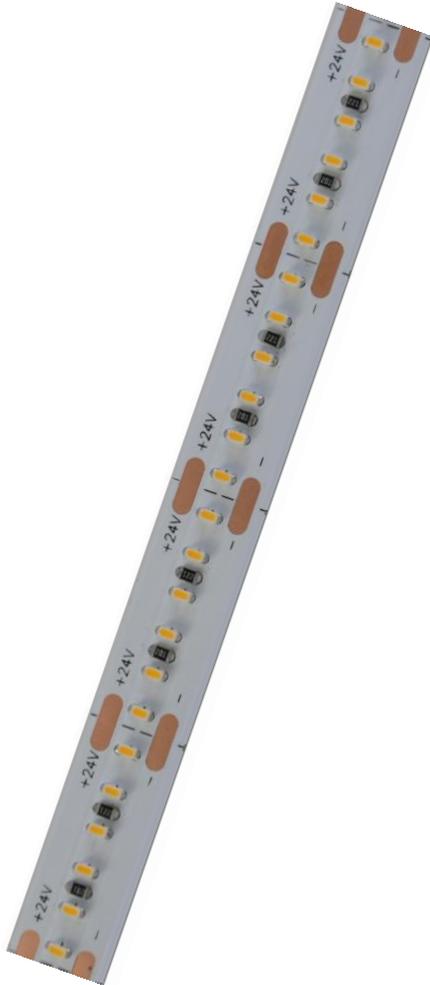

Product Feature


- ◆ 240 leds per meter, 5 meters per roll, the theoretical power 19.2W/meter, Actual power: 16.8W/m, light angle 120 degrees. 6-8lm per led chip. Can be customized according to needed.
- ◆ Flexible, cuttable, back with 3M double-sided adhesive, can be installed in the concave convex surface, easy to install.
- ◆ Led strip supports external light regulator type: 0/1-10V PWM Dali Dimmable inductive switch controller.
- ◆ Cutting unit is 25mm, 6led chips can be used as a unit, cutting does not affect other parts. Normal length is 5 meters, other lengths also acceptable.
- ◆ Low power consumption, low fever, no glare, impact resistance, energy saving and environmental conservation.
- ◆ LED can be customized to glue dust (IP65), (IP66), silicone casing plus glue waterproof (IP68);
- ◆ Life time: Mean time between failure (MTBF): 50-100K hour




Technical Parameters

Mode	LED Q'ty/M	Color temperature		CRI(Ra)	Voltage (V DC)	Electric current (A/m)	Power ± 10 % (W/m)	Lm/m ± 10%	FPC Width
							Actual		
LM2110-WN240-24V	240	White	6000-6500K	90+	24	0.7	16.8	1140	10mm
		Natural Wite	4000-4500K						
		Warm white	2200-3200K						


Dimension(mm/inch)

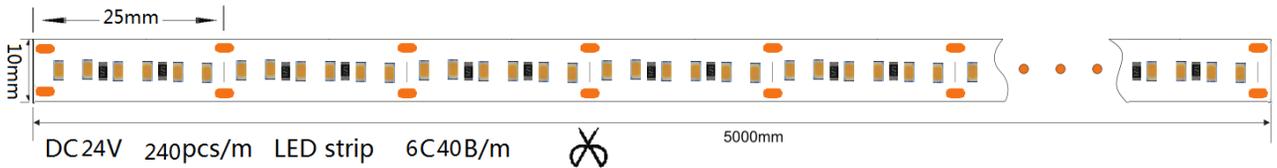


Product Electrical

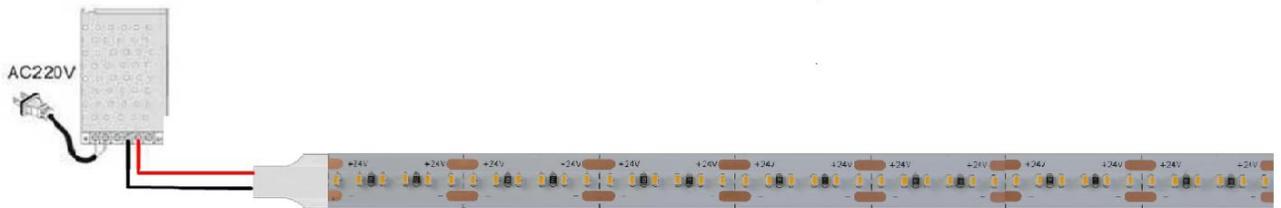


Linking Operation

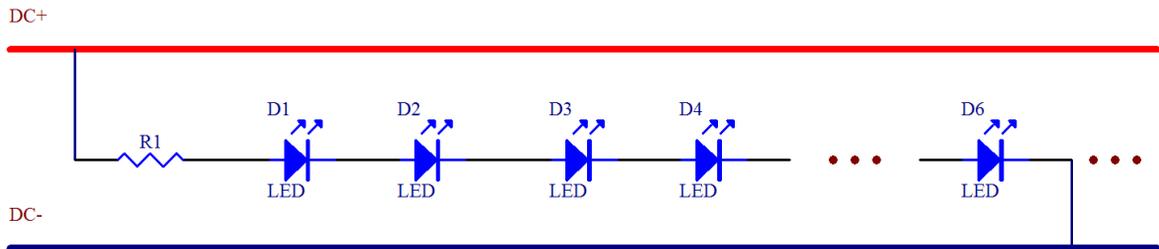

Installation

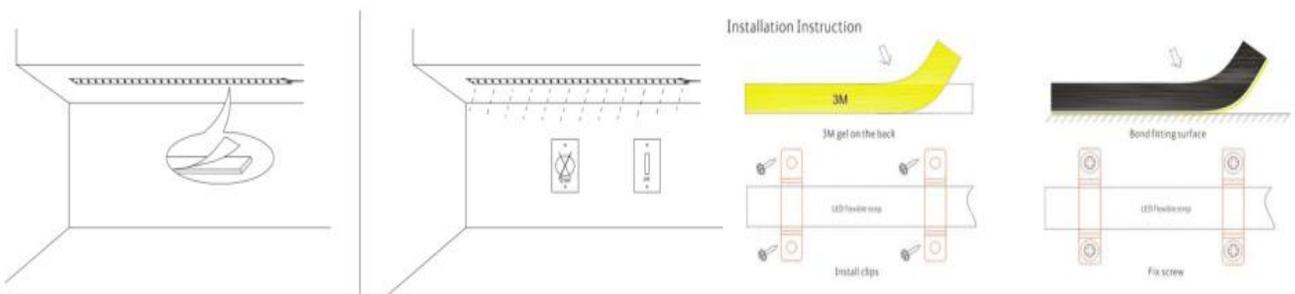

Product Packaging

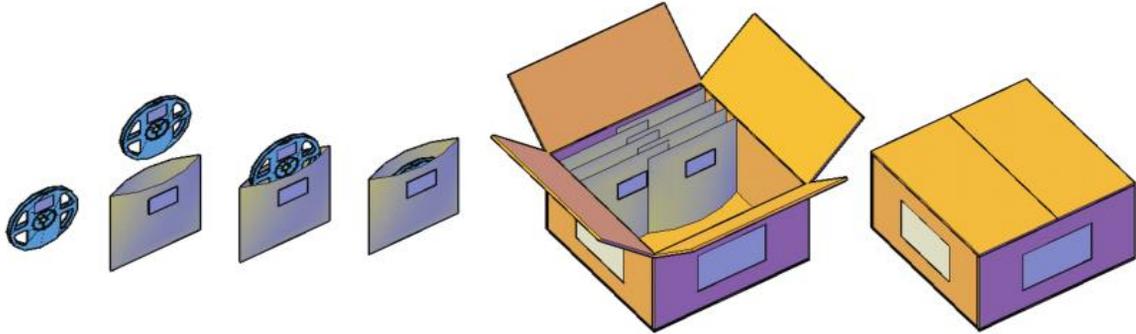

Safety Information

- The strip itself and all its components may not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Installation of LED ribbon (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
- Parallel connection is highly recommended as safe electrical operation mode.
- Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
- Please ensure that the power supply is of adapters power to operate the total load.
- When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between strip and the mounting surface.
- Pay attention to standard ESD precautions when installing the strip.
- Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.